

## HiOSO 74 series EOC System

EOC master.....	2
HA4200W 1-channel Module Outdoor EOC master.....	2
HA4200 1-channel Module Indoor EOC Master.....	4
EOC Slave.....	6
HA424 4RJ45 EOC Slave.....	6
HA424WI-FI 4RJ45+WIFI EOC Slave.....	8
EPON+EOC Solution.....	10
EPON Profile.....	10
EPON Network Feature.....	12
EOC Profile.....	12
EOC Feature.....	12
HiOSO Bidirectional Transformation Solutions.....	12
EPON Solution.....	14
1. EPON FTTH solution.....	14
2. EOC Hybrid Solution.....	16
3. EPON + EOC Hybrid Solution.....	17

## EOC master

### HA4200W 1-channel Module Outdoor EOC master



#### Profile

HA4200W EOC master is single-channel-350M outdoor equipment, which provides 350Mbps access bandwidth and transmitted in lower than 65MHz low-frequency stage. It can work in atrocious weather with good stability because of its waterproof and lightproof shell It is long-distance transmitting, high bandwidth and strong network-adaptable, which full meet requirements of triple play network.

#### Character

- ℓ Correspond with IEEE HomePlug AV、IEEE 802.3 10/100/1000 Ethernet, IEEE 802.3ah standard
- ℓ Occupy the low frequency band under 7.5-65Mhz.Strong ability of ant-interference ,high bandwidth
- ℓ Support SNMP/CLT/WEB/TELNET/SSH
- ℓ Support remotely upgrading and local management with serial port
- ℓ Support SNMPv3 protocol,SSH2 protocol
- ℓ Support IEEE 802.1Q Tag-Based VLAN
- ℓ Support QoS function
- ℓ Support IGMP

## Technical Specification

Parameter	Specification
System Bandwidth	Physical layer data rate 500Mbps MAC layer data rate 320Mbps
Modulation	OFDM
MAC Protocol	TDMA and CSMA
EOC technology	HomePlug AV
Frequency	7.5 ~ 65MHz
Protocol and Standard	IEEE HomePlug AV, IEEE802.3,IEEE802.3x,IEEE802.3uAutoMDI(X)
NMS	WEB CLI SNMP
Data Interface	1 10/100/1000Base-TX RJ45 ports Auto MDI/MDIX Comply with 802.3, IEEE802.3u 1 console port
RF Interface	2 RF ports (Metric thread F type) Output level: 110dB $\mu$ V Insertion Loss: <1dB Flatness in Band: $\pm$ 0.5dB Return Loss: >16dB suppression ratio of out band: 55dB Impedance: 75 $\Omega$ Output level: 100~106dB $\mu$ V
Light Indicator	PWR (power LED) EOC (management system LED) SYS (system LED) CAB (link LED) ETH1/2 (Ethernet port LED)
Distance	Not more than 1000m

## Working Environment

Power	AC220V / AC60V
Power consumption	10W
Working Temperature	-25 $^{\circ}$ C ~ +65 $^{\circ}$ C
Storage Temperature	-40 $^{\circ}$ C ~ +70 $^{\circ}$ C
Working Humidity	10% ~ 90%(non-condensing)
Storage Humidity	10% ~ 95%(non-condensing)

Website: [www.hioso.com](http://www.hioso.com) [www.haishuo.com](http://www.haishuo.com)

Tel: 0086 755 83128820 Fax: 0086 755 83151488

Email: [market@hioso.com](mailto:market@hioso.com)

Address: 6<sup>TH</sup> Flr,12th Bld,Wangtang Industrial Zone,Xingao Rd,Xili,Nanshan District,Shenzhen

Dimension	224mm (L) *200 mm(W) * 110mm (H)
-----------	----------------------------------

## HA4200 1-channel Module Indoor EOC Master



### Profile

HA4200 EOC master is single-channel-350M indoor equipment, it provides 350Mbps access bandwidth with 1-channel outputs. HA4200 EOC master transmits in lower than 65MHz low-frequency stage. It is long-distance transmitting, high bandwidth and strong network-adaptable, which full meet requirements of triple play network.

### Character

- ℓ Correspond with IEEE HomePlug AV、IEEE 802.3 10/100/1000 Ethernet, IEEE 802.3ah standard
- ℓ Occupy the low frequency band under 7.5-65Mhz.Strong ability of ant-interference ,high bandwidth
- ℓ Support SNMP/CLT/WEB/TELNET/SSH
- ℓ Support remotely upgrading and local management with serial port
- ℓ Support SNMPv3 protocol,SSH2 protocol
- ℓ Support IEEE 802.1Q Tag-Based VLAN
- ℓ Support QoS function
- ℓ Support IGMP

## Technical Specification

Parameter	Specification
System Bandwidth	Physical layer data rate 500Mbps MAC layer data rate 320Mbps
Modulation	OFDM
MAC Protocol	TDMA and CSMA
EOC technology	HomePlug AV
Frequency	7.5 ~ 65MHz
Protocol and Standard	IEEE HomePlug AV, IEEE802.3,IEEE802.3x,IEEE802.3uAutoMDI(X)
NMS	WEB CLI SNMP
Data Interface	2 10/100/1000Base-TX RJ45 ports Auto MDI/MDIX Comply with 802.3, IEEE802.3u
RF Interface	2 RF ports (Metric thread F type) Output level: 110dB $\mu$ V Insertion Loss: <1dB Return Loss: >16dB suppression ratio of out band: 55dB Impedance: 75 $\Omega$ Output level: 100~106dB $\mu$ V
Light Indicator	PWR (power LED) EOC (management system LED) SYS (system LED) CAB (link LED) ETH1/2 (Ethernet port LED)
Distance	Not more than 1000m

## Working Environment

Power	AC220V
Power consumption	10W
Working Temperature	-25 $^{\circ}$ C ~ +55 $^{\circ}$ C
Storage Temperature	-40 $^{\circ}$ C ~ +70 $^{\circ}$ C
Working Humidity	10% ~ 90%(non-condensing)
Storage Humidity	10% ~ 95%(non-condensing)

Website: [www.hioso.com](http://www.hioso.com) [www.haishuo.com](http://www.haishuo.com)

Tel: 0086 755 83128820 Fax: 0086 755 83151488

Email: [market@hioso.com](mailto:market@hioso.com)

Address: 6<sup>TH</sup> Flr,12th Bld,Wangtang Industrial Zone,Xingao Rd,Xili,Nanshan District,Shenzhen

## EOC Slave

### HA424 4RJ45 EOC Slave



#### Profile

HA424 supplies one RF hybrid signal input port, one RF CATV output port and four 100M full-duplex RJ45 output Ethernet ports to have access to both TV and computer. HA424 supports bandwidth set, and supports to limit the max uplink and downlink bandwidth.

#### Character

- ℓ Adapt Qualcomm (Atheros) AR7411 chipset
- ℓ support 7.5-65MHz data transmission, 87-862MHz video transmission
- ℓ Good anti-jamming capability with OFDM (kind of MCM, Multi-Carrier Modulation) and channel-adaptive technology.
- ℓ Highly adaptable to network, amplifier and distributor.
- ℓ Highly effective filter, lower interference to CATV
- ℓ Supply VLAN, IGMP and QoS
- ℓ Support SNMP, WEB and CLI management
- ℓ Support remote software upgrade
- ℓ Managed intensively by central EOC, support TELNET management
- ℓ No need to configure, start work once connected

### Technical Specification

EOC character	Frequency	7.5-65MHz
	Output Power	$\geq 110\text{dBuV}$
	Modulation	OFDM
	Physical Layer Bandwidth	500Mbps
	IP Layer Throughput	Sharing 50-85Mbps
	RF IMPEDANCE	75 $\Omega$
CATV RF	Frequency	87-862MHz
	Reflect loss	$>16\text{dB}$
	Insertion loss	$\leq 1\text{dB}$
LED	POWER / CABLE / LAN 1/2/3/4	
Size (L×W×H)	180(mm)*110(mm)*31(mm)	

### Working Environment

Power	DC12V
Working Temperature	-10°C ~ +55°C
Storage Temperature	-40°C ~ +70°C
Working Humidity	10% ~ 90%(non-condensing)
Storage Humidity	5% ~ 90%(non-condensing)

## HA424WI-FI 4RJ45+WIFI EOC Slave



### Profile

HA424WIFI wireless EOC slave supplies one RF hybrid signal input port, one RF CATV output port and four 100M full-duplex RJ45 output Ethernet ports. It can transmit and receive Ethernet signal through CATV coaxial cable but not interfere the CATV signal.

### Character

- ℓ Good anti-jamming capability with OFDM (kind of MCM, Multi-Carrier Modulation) and channel-adaptive technology.
- ℓ Highly adaptable to network, amplifier and distributor.
- ℓ Highly effective filter, lower interference to CATV
- ℓ Supply VLAN, IGMP and QoS
- ℓ Support SNMP, WEB and CLI management
- ℓ Support remote software upgrade
- ℓ Managed intensively by central EOC, support TELNET management
- ℓ No need to configure, start work once connected
- ℓ Support 802.11b/g/n wifi, multiple SSID
- ℓ Support PPPoE/Static IP/DHCP
- ℓ Good anti-jamming capability with OFDM (kind of MCM, Multi-Carrier Modulation) and channel-adaptive technology.

Website: [www.hioso.com](http://www.hioso.com) [www.haishuo.com](http://www.haishuo.com)

Tel: 0086 755 83128820 Fax: 0086 755 83151488

Email: [market@hioso.com](mailto:market@hioso.com)

Address: 6<sup>TH</sup> Flr, 12th Bld, Wangtang Industrial Zone, Xingao Rd, Xili, Nanshan District, Shenzhen



- ℓ Highly adaptable to network, amplifier and distributor.
- ℓ Highly effective filter, lower interference to CATV
- ℓ No need to configure, start work once connected

### Technical Specification

WiFi character	Frequency Range	2.4~2.4835GHz
	Transmission Rate	11n: 270/243/216/162/108/81/54/27Mbps 135/121.5/108/81/54/40.5/27/13.5Mbps 130/117/104/78/52/39/26/13Mbps 65/58.5/52/39/26/19.5/13/6.5Mbps
		IEEE 802.11g: 54/48/36/24/18/12/9/6
		IEEE 802.11b: 11/5.5/2/1M
		Operation Channel
	spread-spectrum tech	DSSS
	Data Modulation	DBPSK、DQPSK、CCK and OFDM(BPSK/QPSK/16-QAM/64-QAM)
	Sensibility	270M: -68dBm@10% PER; 130M: -68dBm@10% PER 108M: -68dBm@10% PER; 54M: -68dBm@10% PER 11M: -85dBm@8% PER; 6M: -88dBm@10% PER 1M: -90dBm@8% PER(typical)
	TransmissionDistance	Indoor up to 120 meter ; Outdoor up to 360meter
	RF Power	20dBm EIRP
antenna	3dBi HG omni antenna	
EOC character	Frequency	7.5-65MHz
	Output Power	≥110dBuV
	Modulation	OFDM
	Physical Layer Bandwidth	500Mbps
	IP Layer Throughput	Sharing 50-85Mbps
	RF IMPEDANCE	75Ω
CATV RF	Frequency	87-862MHz
	Reflect loss	>16dB
	Insertion loss	≤1dB
LED	POWER / WIFI / CAB / EOC / LAN 1/2/3/4	
Size (L×W×H)		180(mm)*110(mm)*31(mm)

### Working Environment

Power	DC12V
Working Temperature	-10℃ ~ +55℃
Storage Temperature	-40℃ ~ +70℃
Working Humidity	10% ~ 90%(non-condensing)
Storage Humidity	5% ~ 90%(non-condensing)

Website: [www.hioso.com](http://www.hioso.com) [www.haishuo.com](http://www.haishuo.com)

Tel: 0086 755 83128820 Fax: 0086 755 83151488

Email: [market@hioso.com](mailto:market@hioso.com)

Address: 6<sup>TH</sup> Flr, 12th Bld, Wangtang Industrial Zone, Xingao Rd, Xili, Nanshan District, Shenzhen

## II EPON+EOC Solution

### Preface

Through 20 years development, China CATV network owns largest amount users in the world. At the end of 2006, there are one hundred million CATV users (46 million in country); about 3300pcs front terminals; 40,000KM national-level optical cable line, more than 100,000km provincial/prefecture-level optical cable line, and 300,000km prefecture/county distribution network. At the end for Q1th, 2007, there are 15 million cable digital TV users. Several cities complete CATV digital integrated transformation, and supply multi broadcasting services. Some network companies implemented broadband data access, VOD and other bi-directional services.

However, there are 90% CATV network haven't implemented bi-directional transformation. It just meets the requirements of analog TV transmission, but can't transmit multimedia mutual services through the existed network.

CATV network meets fierce competition: Telecom network operate IPTV service, to win CATV high medium-end customers; DBS service and DTV service scramble for CATV medium low-end customers. These competition is competition between high-bandwidth and low-bandwidth, bi-directional network and unilateral network, multi-service and single service, high cost and low cost. As fiber access to residential area, copper cable transmission distance short to 100m, and development of multi service access technology, the bandwidth advantage of coaxial network is losing. Unitary DTV integrated transformation couldn't change this situation. So, the future of CATV network is developing bi-directional transmission services at the base of the huge existed HFC network.

### EPON Profile

EPON adopts point to multi-point topology structure, using fiber and passive components for

Website: [www.hioso.com](http://www.hioso.com) [www.haishuo.com](http://www.haishuo.com)  
Tel: 0086 755 83128820 Fax: 0086 755 83151488  
Email: [market@hioso.com](mailto:market@hioso.com)  
Address: 6<sup>TH</sup> Flr, 12th Bld, Wangtang Industrial Zone, Xingao Rd, Xili, Nanshan District, Shenzhen

physical layer transmission and offering multi services bandwidth access technology at the base of Ethernet protocols.

EPON system consists of an OLT (Optical Line Termination)), ONU (Optical Network Unit) and ODN (Optical Distribution Network). ODN includes optical splitter and fiber. The splitter is a passive device, used to connect the OLT and ONU, distributing downlink data and integrate uplink data. EPON adopts 802.3 frame broadcast technology for downlink data flow, and TDM technology for uplink data flow. EPON also adopts MPCP (multi-point control protocol), as the data from uplink can be transmitted to only one user each specified time.

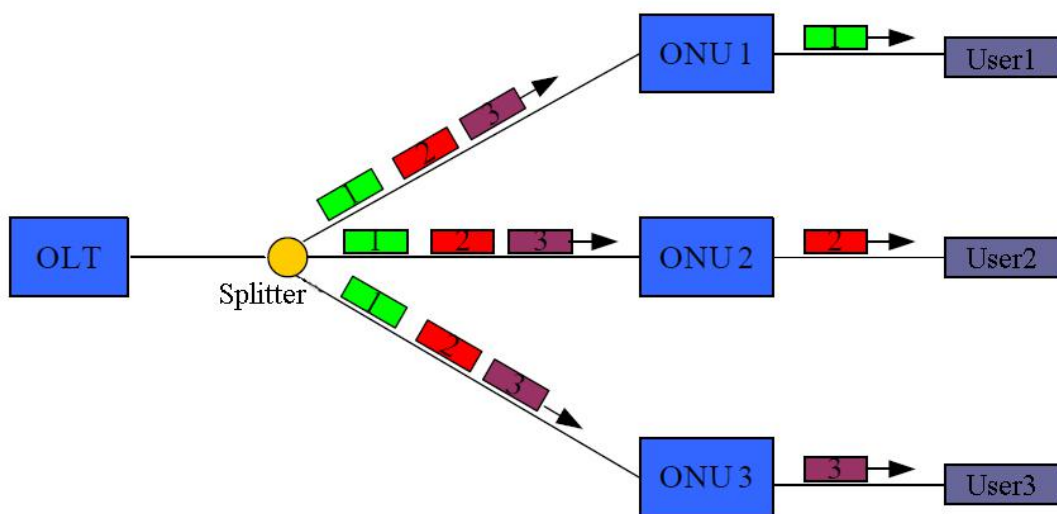


Figure 1 EPON downstream data flow

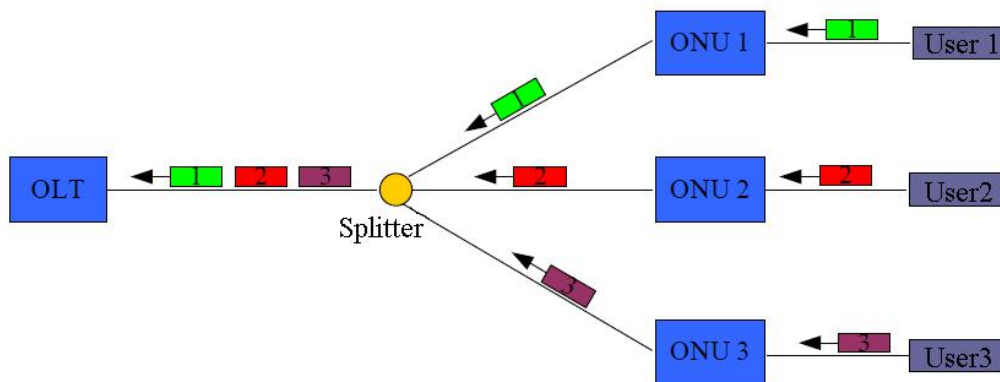


Figure 2 EPON upstream data flow

EPON system integrates the advantage of PON technology and Ethernet technology. It offers a low cost solution to supply bandwidth and fiber access from CO to terminal users. PON system adopts point to multi-point topology structure, and uses passive components to lower maintenance cost. It offers a best bandwidth access solution for access network.

## **EPON Network Feature**

- ℓ* Save trunk network fiber resource, one fiber allow multi fiber access through passive splitter
- ℓ* Low building cost and maintenance cost, as passive component is used during transmission, and convenient to upgrade
- ℓ* Offer 1.25G uplink and down link symmetrical bandwidth
- ℓ* Point-to multi-point network, covers large area
- ℓ* Flexible bandwidth allocation, supply port SLA and QoS assurance
- ℓ* Support 1550nm CATV signals transmitted in the same network through WDM technology

## **EOC Profile**

EOC (Ethernet Over Coax) technology adopts CATV coaxial network to transmit Ethernet signal. It adopts specified medium conversion technology (mainly include impedance conversion, balance/imbalance conversion), transmit 802.3 standard data signals through coaxial cable, to users home. EOC technology apply to multi services: surf Internet at high speed, HD/SD, broadcasting, IPTV, VOD and VOIP.

## **EOC Feature**

- ℓ* Apply to HFC network structure, no need to reconstruct the existed network in the building, takes full advantage of coax cable resource in the HFC network
- ℓ* High reliability, convenient maintenance. Central device and branch devices in the building are all passive, less faults.
- ℓ* High adaptive capability, high bandwidth, strong anti-noise capability and link loss endurance.
- ℓ* Convenient to install, no need to adjust at the terminal ends.
- ℓ* SNMP supported, convenient to operate.

## **HiOSO Bidirectional Transformation Solutions**

EPON (Ethernet passive optical networks) adopts point to multi-point topology structure, using fiber and passive component for physical layer transmission. It supplies multi services through

Ethernet protocols. EPON is a multi users shared system. EPON integrates the advantage of PON technology and Ethernet network technology, with simple topology structure, low cost, and no active devices between terminal end and central office. EPON topology structure is like the CATV network structure, it can use CATV network fiber line to transmit data service, saving network building cost. It is the best solution for broadcasting TV network bi-directional transformation.

EOC is a general designation for the technologies, which use coaxial cable to transmit Ethernet data. So, video, data and voice service can be transmitted together through one coaxial cable. Downlink network transmits CATV and voice signal, uplink network transmits data signal, so to supply a return path for bi-directional DTV platform.

HiOSO EPON includes HA7000 series OLT and HA7200 series ONU; EOC system includes HA3200 series central device and HA300 series terminal device.

HiOSO EOC applies to HomePlug AV standard, using 7.5 ~ 30MHz low frequency band in the HFC network to transmit data service, and separate CATV signal and data signal. HiOSO EOC adopts OFDM technology to enhance the anti-jamming ability, and use point to multi-point communication control protocol technology, to transmit Ethernet data through point to multi-point coaxial access network. EOC solution supplies a high-efficiency and stable solution for bi-directional transformation.


## **EPON Solution**

### **1. EPON FTTH solution**

FTTH (Fiber To The Home) solution, place EPON head end equipment OLT in the control station, adopt cascaded network structure by using optic splitters, then connect to EPON terminal equipment ONUs when fiber reaches to user end. EPON solution implements point to multipoint communication, save fiber resource, provide fast broadband access, and passive network structure with low fault spot, convenient for maintenance.

# HiOSO EPON System Solution

## EPON+FTTH Solution

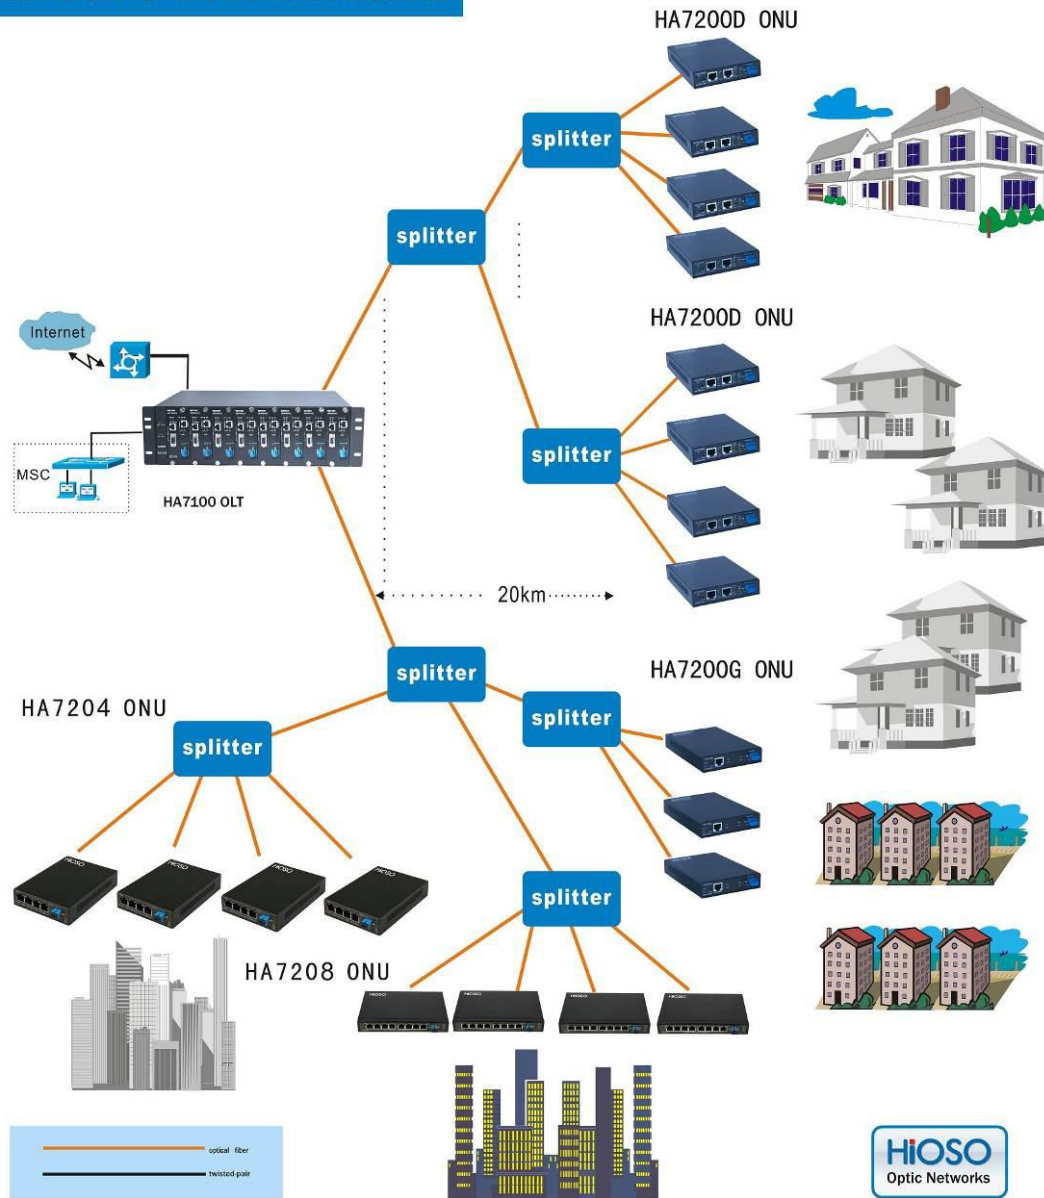


## 2. EOC Hybrid Solution

EOC (Ethernet Over Coax) is mainly used in CATV bidirectional network transformation. EOC system consists of HA3200 series EOC master, HA300 series EOC slave and coaxial distribution network.

CATV signal from the CATV optical transmitter and IP signal from IP transmitting equipment in the control center, transmit to HA3200W EOC master at the optic node, HA3200W integrates the two signals and then output from the Hybrid RF port to coaxial network. If there are one way RF amplifiers connected in the distribution network, IP signal can't return from user end EOC slave to EOC master, bridge needed to implement bidirectional communication.

HA302 EOC slave at user end divides the IP signal and CATV signal, offers two 10/100M RJ45 output ports and one RF cable port. Ethernet ports for PC and VOIP, and cable port for CATV.



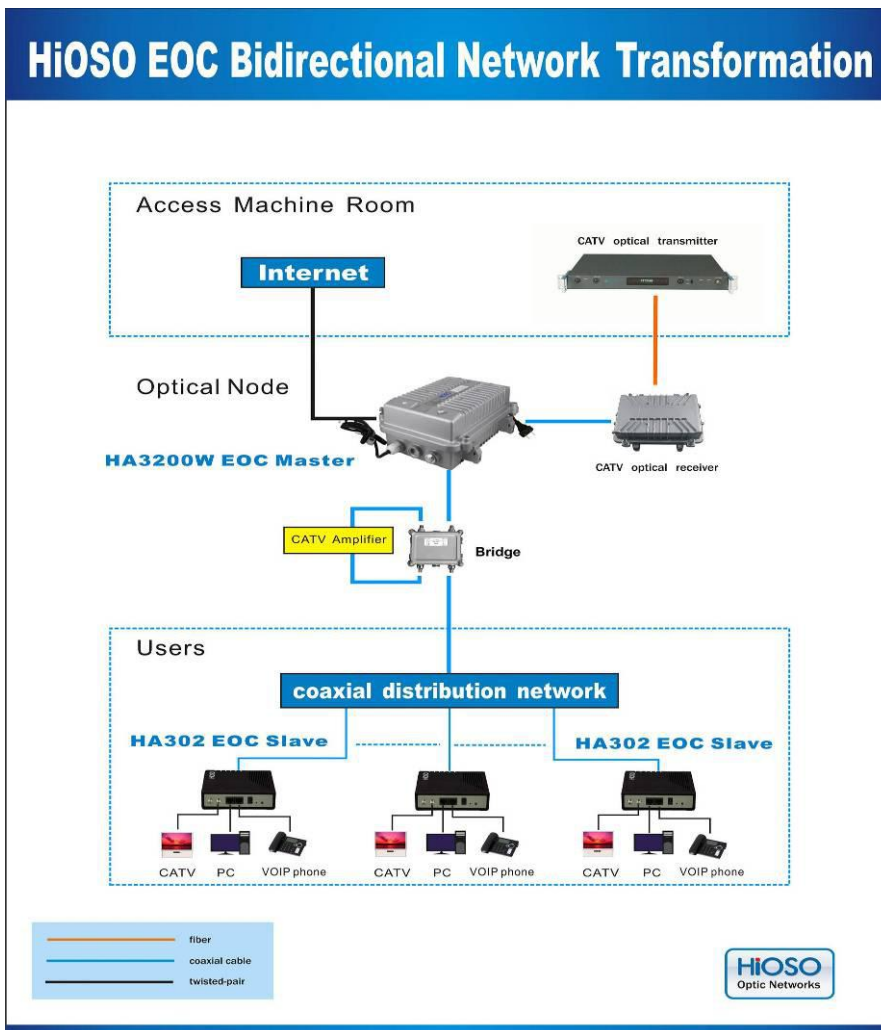

### 3. EPON + EOC Hybrid Solution

This solution implements bidirectional network transformation based at HFC network. As the EPON network structure is similar to HFC network structure, no need to greatly change the existing HFC network. Just set the headend equipment OLT at the control center, connect to a preserved fiber, then connect to the splitter. IP signals split to the terminal equipment ONU at optic node. Then IP signal is access to the optic nodes.

Access user home network adopts EOC technology to implement “last mile” access. EOC master at the optic node integrates the CATV signal and IP signal, then transmit to EOC slave through coaxial distribution network. Then EOC slave divides the CATV signal and IP signal. EOC slave offers one cable output port for CATV and two 100M output ports for internet and VOIP, so to

implement triply play services access.

# HiOSO EPON+EOC System Solution 2

